

Labelette FS Labeler

Semi-Automatic F-Style Container Labeler



Key Features:

- Machine is ready to use in only 10 minutes
- Custom can holders for precision can holding
- Sanitary stainless steel frame
- Touch screen PLC control system
- Digital thermostate for longer adhesive life in the glue pan
- Direct heat roller design lowers glue fumes, reduces waste and is easier to clean
- Synchronized registration for container panel registration
- Environmentally friendly design requires less than half the power of previous Labelette and competitor models
- Overhead pressure arm for tight label wrap
- Label feed uses rotary clutches
- 360 Degree rotary glue seals keep excess glue in the pan

Options:

- Tooling kits for larger cans
- Heavy duty locking casters
- Bulk supply hot melt adhesive
- Label-Solve adhesive remover (with orange oils for environment sensitive cleanup)
- Label-Solve Spray (For easy spray on wipe clean up)




1399 Specialty Dr., Vista CA 92081 • 760.734.4177 • Fax 760.734.4188
Email: Sales@AccutekPackaging.com • AccutekPackaging.com

ACCUTEK
Packaging Equipment Companies, Inc.

Labelette FS Labeler

Semi-Automatic F-Style Container Labeler

Labelette's FS glue labeling machines are designed to eliminate the problems associated with labeling canisters and rectangular products. The FS Labeler is a stand alone labeler that separates a single sheet cut paper label from a 1 inch thick stack, applies a controllable adhesive pattern, and adheres the label to the container. The FS Labeler applies a tight label with a skip glue pattern using hot melt adhesive. Custom can holders are required for each can size. This machine handles both metal and plastic F-Style containers.

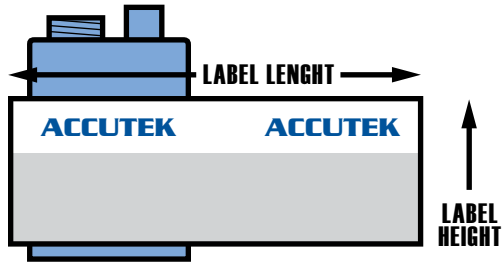

Dimensions:

Length: 47" (119.4 cm)
Depth: 44" (111.8 cm)
Height: 34" (86.4 cm)

Weight:

Approx. ~480 lbs. (218 kg)

Labeling Speed:

Up to 10 CPM*

Label Type:

Sheet Cut Paper Labels

Label Size:



Length: 7.5" - 24"
Height: 1.75" - 11.75"

Electrical:

120VAC - 15 AMPS (optional)
220VAC

Air Requirements:

90 PSI @ 3CFM

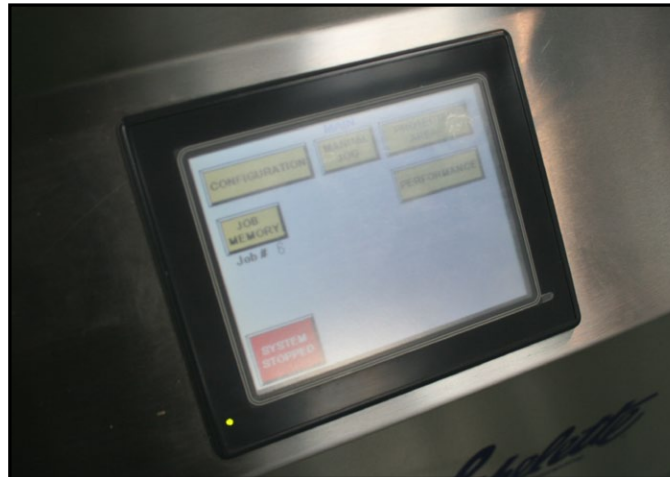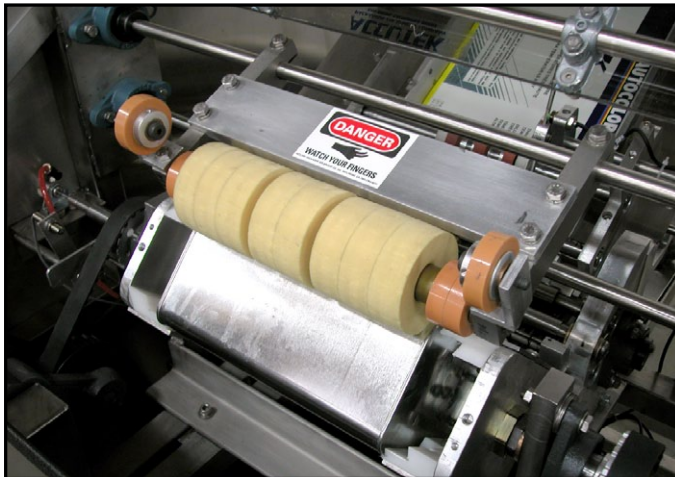

* Labeling speed is dependent on operator, container, and label dimensions.

